


# Xerox® Integrated Color Server for the Xerox® PrimeLink® C9065/C9070 Printer

Modernize the way you work.

With the combination of the Xerox® PrimeLink® C9065/C9070 Printer and the Xerox® Integrated Color Server, powerful performance is at your fingertips. Engineered for high-end office applications, it combines world-class color and workflows for transformative results.

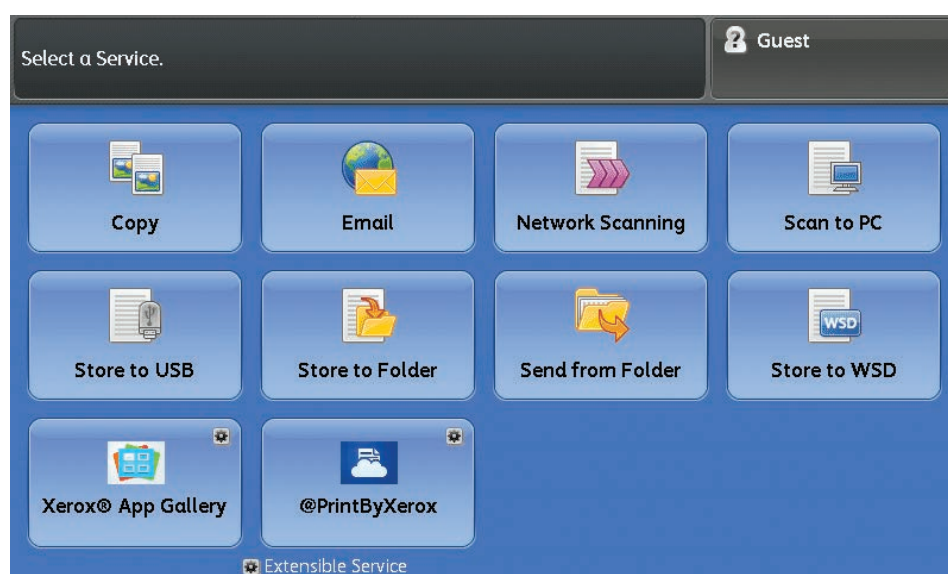

Extend your capabilities with apps from the Xerox App Gallery.

- Tailor your device to work the way you do with the ever-evolving selection of innovative apps available on the Xerox App Gallery.
- Increase your opportunities with an expansive media selection — including Extra Long Sheet (XLS) for creative banner printing — and inline finishing capabilities ranging from stapling and hole-punching to folding for presentations, brochures, reports and newsletters.
- Use Xerox® Standard Accounting and internal auditing to track device usage, set limits and control costs.
- Customize your print driver settings to save on specific applications — such as always printing emails in black and white.
- Maximize your productivity by performing scan, print, copy, fax and file routing operations simultaneously.
- Easily share files or introduce electronic archiving with powerful scan capabilities. Text-searchable files make retrieval simple. And compression technology reduces network load for faster transmission.
- Automate document routing to predefined locations such as email addresses with job flow sheets.
- Enjoy automatic installation, troubleshooting, feature setup and upgrades with the Xerox® CentreWare® IS Embedded Web Server.
- Replenish supplies automatically — Xerox® Automated Meter Readings (AMR) collects and submits readings and Xerox® Automatic Supplies Replenishment (ASR) orders ink whenever supplies run low.
- Securely print from any email-enabled device with @PrintByXerox. No software or app to download. No IT intervention. Just send an email and print at the device.

# Xerox® Integrated Color Server

## HARDWARE SPECIFICATIONS

- Hard Drive: 320 GB Hard Disk Drive
- Processor: 1.6 GHz Dual-core
- Memory: 4 GB RAM
- OS Platform: Linux
- 10.4-inch color touchscreen flat panel display
- 10/100/1000MBT/sec standard

## PRINT FEATURES

- Automatic two-sided
- Secure print
- Delay print
- Sample set
- Booklet creation
- Cover selection
- Paper selection by attribute
- N-up
- Watermarks
- Banner sheets
- Output tray selection
- Standard USB
- Color shift slider bars

## STANDARD APP CAPABILITIES

- Xerox App Gallery
- @PrintbyXerox

## FAX

- Optional Walkup PSTN fax (one-line and two-line options) with internet fax
- Fax over IP (T.38) Kit
- Network Server Fax Enablement Kit features:
  - Fax
  - Fax Forward
  - Two-sided Send and Receive
  - Fax up to 11 x 17 in./A3

## ACCOUNTING

- Xerox® Standard Accounting (copy, print, fax, scan)
- Enabling Color access control
- Network Accounting Enablement Kit

## CLIENT ENVIRONMENTS SUPPORTED

- Windows® XP, Windows Server 2003 (32- and 64-bit), Windows Server 2008 (32- and 64-bit), Windows Server 2012, Windows Vista (32- and 64-bit), Windows 7 (32- and 64-bit), Windows 8 (32- and 64-bit), Mac OS® 10.7 and above, Solaris® 9 and 10, HP-UX® 11 v2, IBM® AIX® 5, Red Hat® Fedora® Core 15-17, Red Hat Enterprise 4 and 5 openSUSE® 11 and 12, Ubuntu® Unix®
- Citrix, WHQL certification\*

## PDLs AND DATA FORMATS

- PDF, XPS®, PCL® 6, HP-GL2 (direct submission), TIFF, JPEG
- Adobe® PostScript® 3™ (highly recommended option)

## SCAN AND COPY

A robust set of scan/copy functions plus:

- Thumbnail Preview
- Scan to: Home, Desktop WIA, Desktop TWAIN, Mailbox, FTP, sFTP, USB Storage Device, Remote Printer, Fax Server, SMB, Network Scanning
- Scan to: Multiple Destinations
- Scan via: NDS, SMB, HTTP, HTTPS
- High compression or quality file size settings
- Searchable PDF

## SECURITY

- Access Controls
- AES 256-bit Encryption
- Audit Log
- Certificate Path Validation
- Certificate Revocation List (CRL)/ Status Protocol (OCSP)
- Common Criteria Certified
- Detection of External Program Falsification (XCP Plug-in)
- Domain Filtering
- FIPS 140-2
- Firmware Verification



- Immediate Disk Overwrite
- IP Address Filtering
- IPsec
- Network Authentication
- Pre-installed Self-Signed Certificates
- Role-Based Permissions
- Secure Print
- Security Certificate Management
- SIPRNet
- Smart Card Enablement (CAC/PIV/.NET)
- SNMPv3
- Status Protocol (OCSP)
- TLS/SSL

## OTHER OPTIONS

- USB Direct Print, Media Card Reader, Common Access Card Enablement Kit, Accounting Options
- Xerox Extensible Interface Platform® Enabled, Foreign Device Interface
- Mobile/Smartphone Printing

## ELECTRICAL REQUIREMENTS

- Printer: 110-127 VAC, 50/60 Hz
- Options: 100-240 VAC, 50/60 Hz
- Optional Feeding/Finishing:
  - Each module requires 100-240 VAC, 50/60 Hz power

## PRINTER DIMENSIONS

Base Unit w/ Offset Catch Tray:

- Height: 54.8 in./1,391.5 mm
- Width: 62 in./1,574 mm
- Depth: 31.6 in./803.5 mm

For more information on the Xerox® Integrated Color Server, please contact your Xerox representative, call **1-800-ASK-XEROX** or visit us online at **xerox.com**.

\* Dependent on configuration, software version